



Atmospheric Water Generators

2024 Catalogue

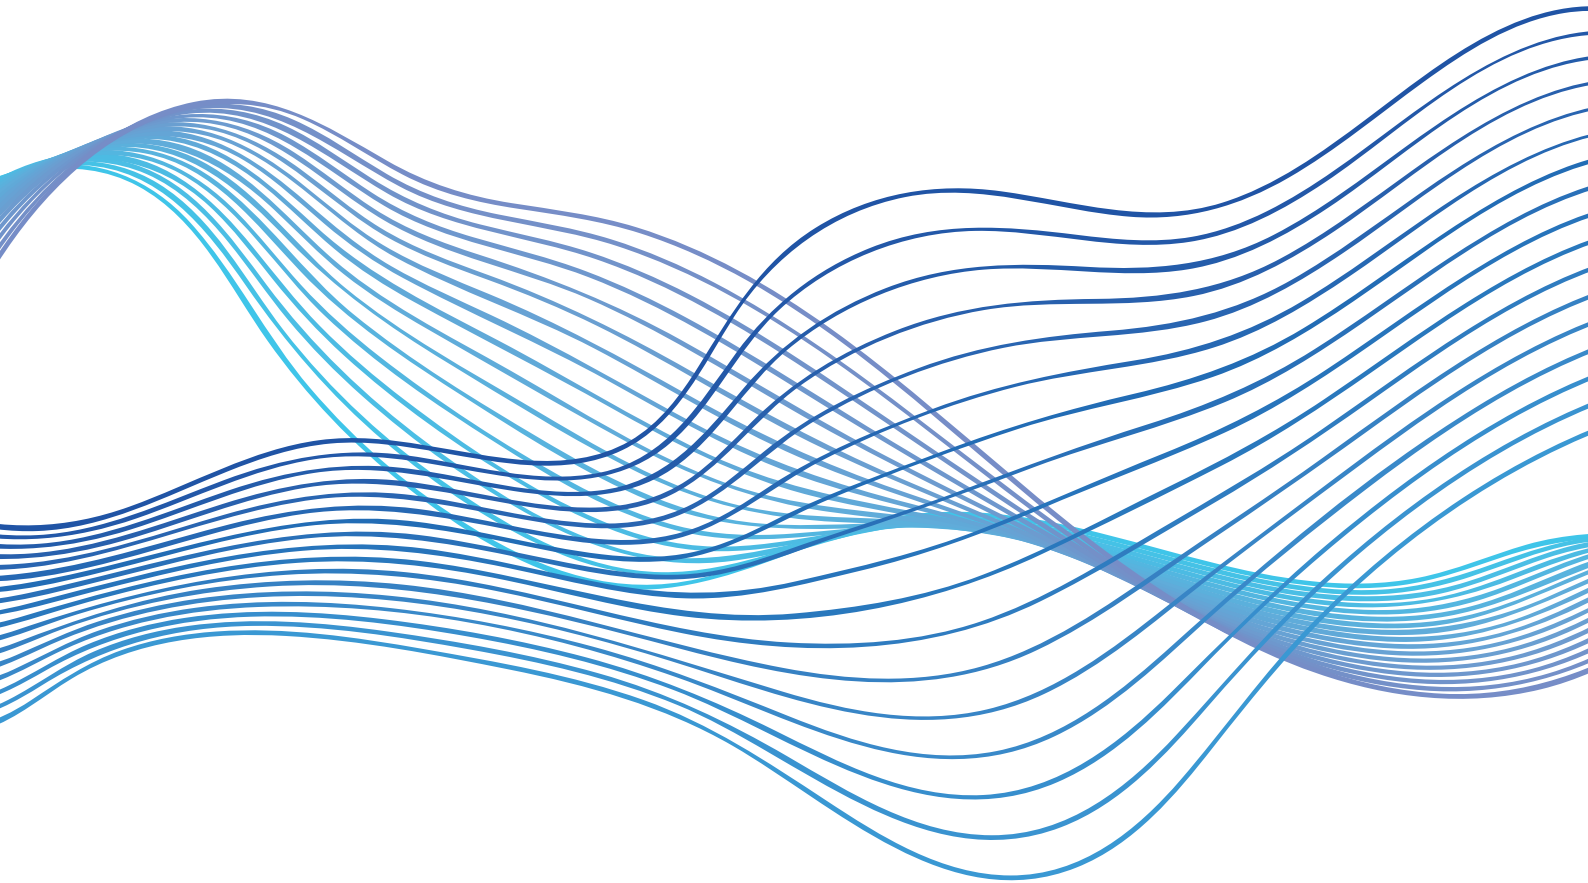

Water from Air

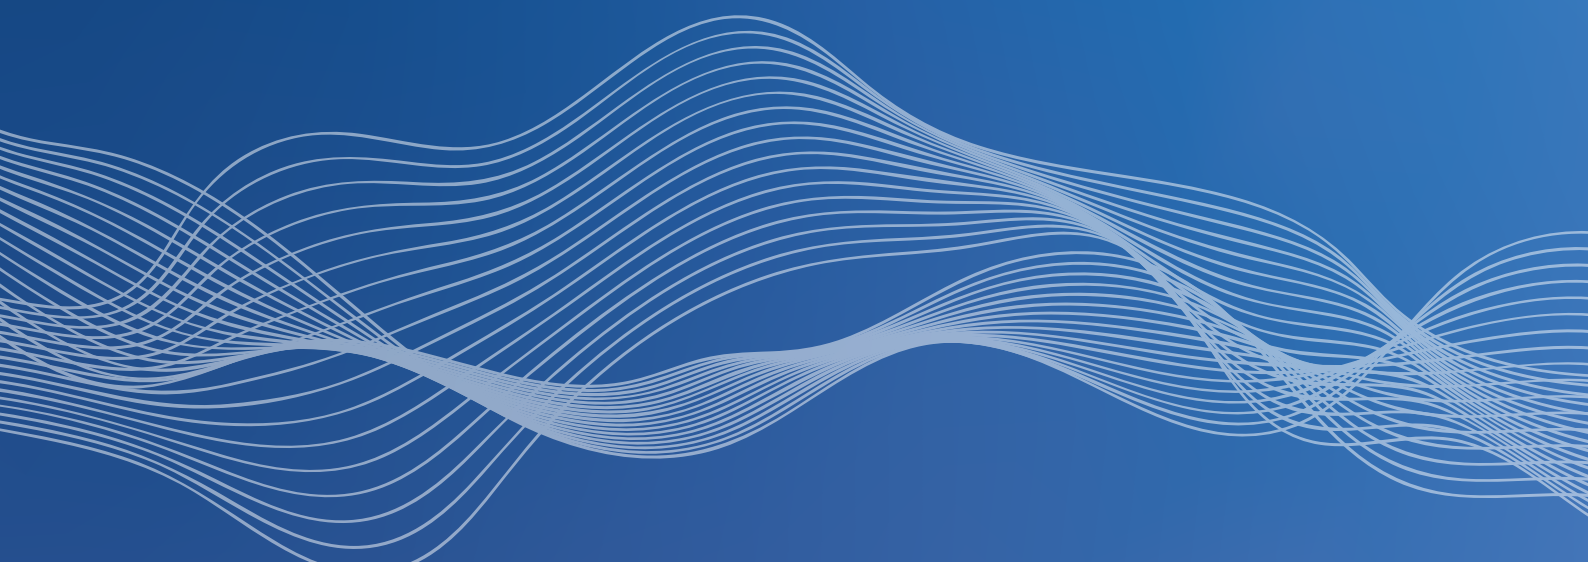

INDEX



05	About us
06	Our technology
07	Why GENAQ
08	Applications
10	Solutions
13	GENAQ Stratus
14	GENAQ Stratus S50
16	GENAQ Stratus S200
19	GENAQ Nimbus
20	GENAQ Nimbus N500
22	GENAQ Nimbus N4500
25	GENAQ Cumulus
26	GENAQ Cumulus C50
28	GENAQ Cumulus C500
30	GENAQ Cumulus C5000
35	GENAQ AWGplant

About us

At GENAQ we create **water from air**.

Since 2008, we design and manufacture Atmospheric Water Generators, an innovative solution.

Our mission is to democratize the access to high-quality drinking water, at a low cost, and in a sustainable way, thanks to advanced technological solutions.



+35	+35k	+70
years of experience in Industrial HVAC-R	sqm of production facilities	countries where we have supplied

A journey through our history

We are part of **KEYTER GROUP** with +35 years of experience in air conditioning and refrigeration solutions and +100M EUR in operating revenues. These resources ensure our financial and industrial capacity to face high production and quality requirements.




Our Technology


How AWG works

Atmospheric Water Generation replicates the natural process of rain. It condenses air moisture using refrigeration technology. Just air and energy are needed.

- High-level air filtration
- Efficient heat exchangers
- Optimized refrigeration system
- High-quality water treatment
- Advanced control + IoT

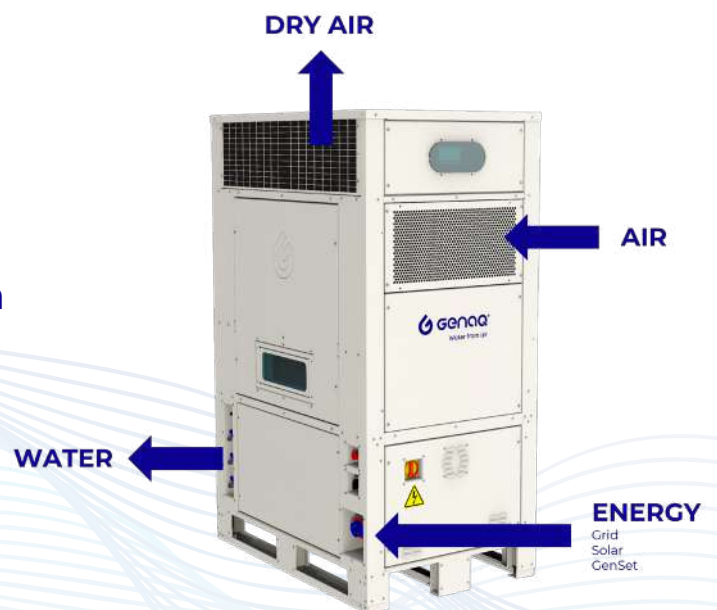


Benefits




Pure Water
Free of Chemicals
and Plastics




Efficiency
High generation + Low power =
Low cost per liter (< 0.2 kWh/liter)



Autonomy
Off-grid
No logistics



Sustainability
Zero waste
Preserves natural resources




Plug & Drink
No installation
Easy maintenance

Water anywhere you need

CLIMATE CHAMBER

Impafri

GenAQ

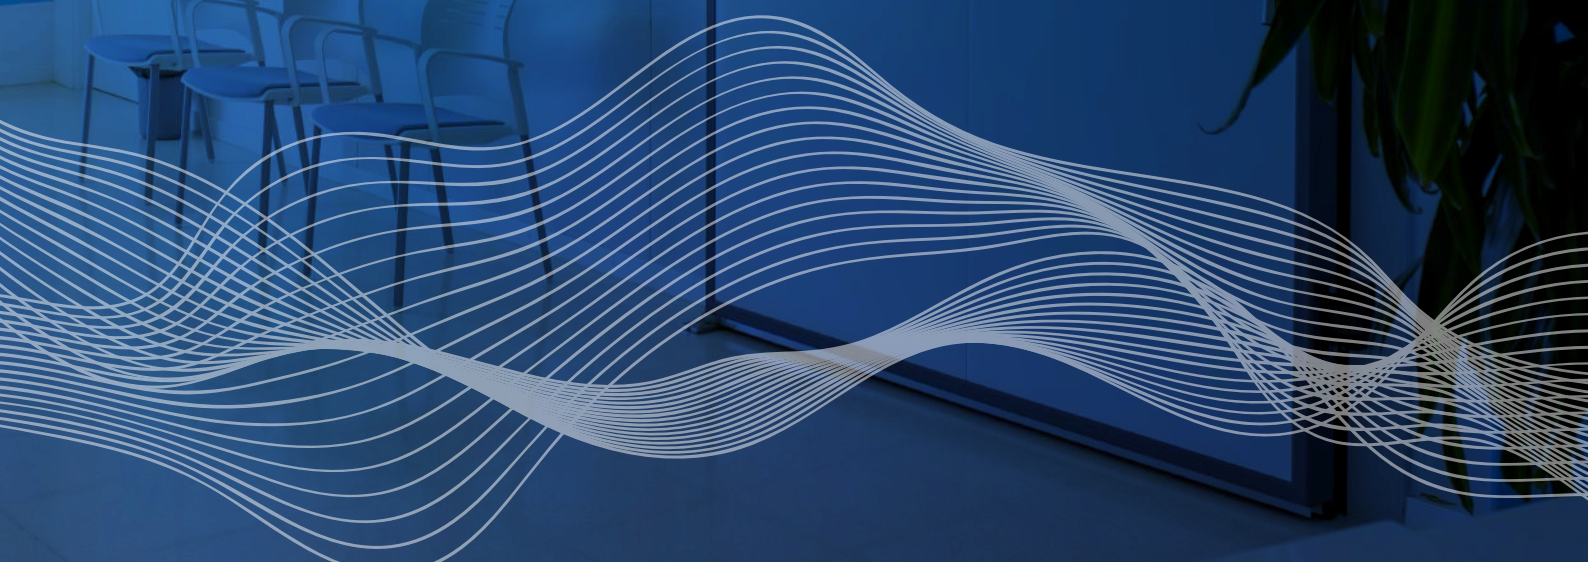

Why GENAQ?

GENAQ is recognized as a professional, high quality and high-efficiency brand in the AWG sector. This is the result of over 160 engineer-years spent in developing advanced knowledge in heat transfer, water treatment and control, to achieve the most reliable and efficient atmospheric water generators, becoming the preferred option for drinking water supply.

+35 years of experience

Own technology

Own manufacturing

Highest efficiency

Tested in Climate Chamber

Remote monitoring and control



Major Certifications



ISO 9001



Audited Performance
(Generation vs T & RH)



CE Declaration
of Conformity



Water Quality:
EU, WHO, EPA...



EU Seal
of Excellence


Major Awards



Applications


Commercial

- Offices
- Homes
- Hotels
- Hospitals
- Restaurants
- Public premises

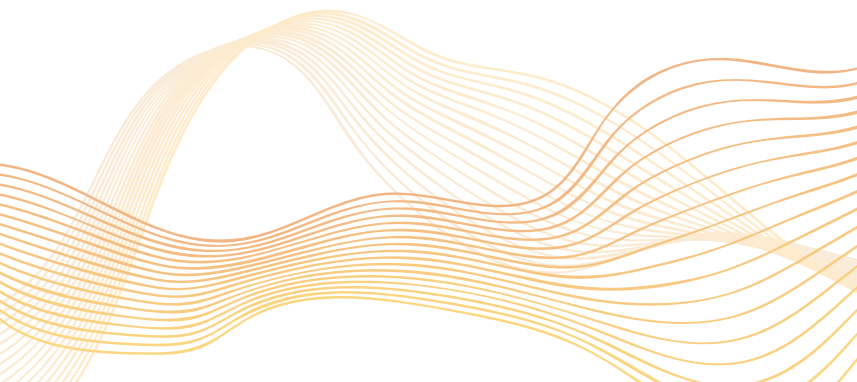

Emergencies


- Disaster Relief
- Military Camps
- Humanitarian Aid
- Development Aid
- Civilian Camps

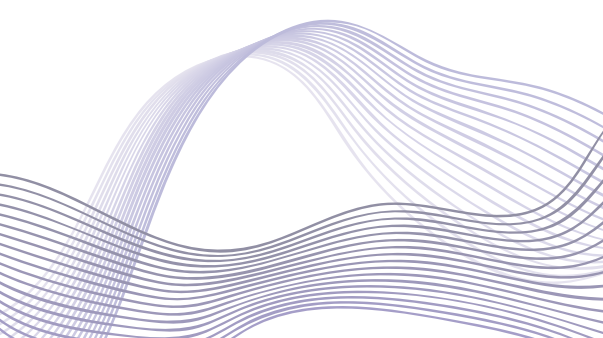



Industrial

<ul style="list-style-type: none"> Industrial sector Remote locations Off grid buildings 	<ul style="list-style-type: none"> Power plants Mines & Oil rigs Construction sites
---	--

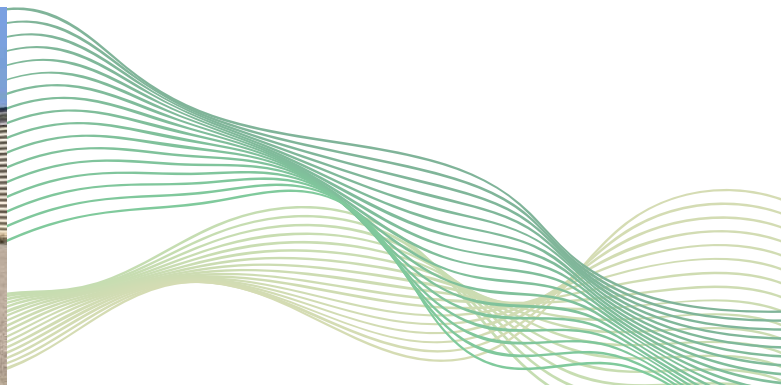

Large Scale


<ul style="list-style-type: none"> Residential water supply Food industry Bottling plants 	<ul style="list-style-type: none"> Industrial processes Customized projects
--	---


Solutions

STRATUS by GENAQ



CUMULUS by GENAQ

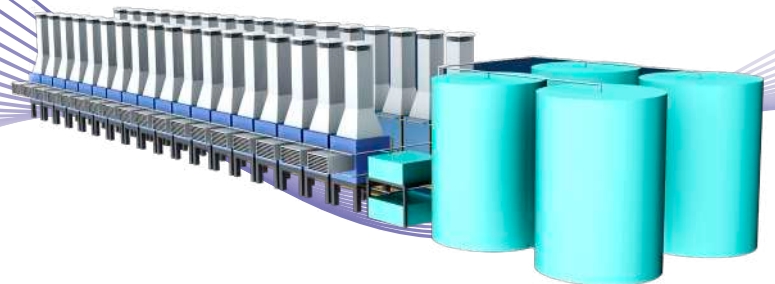

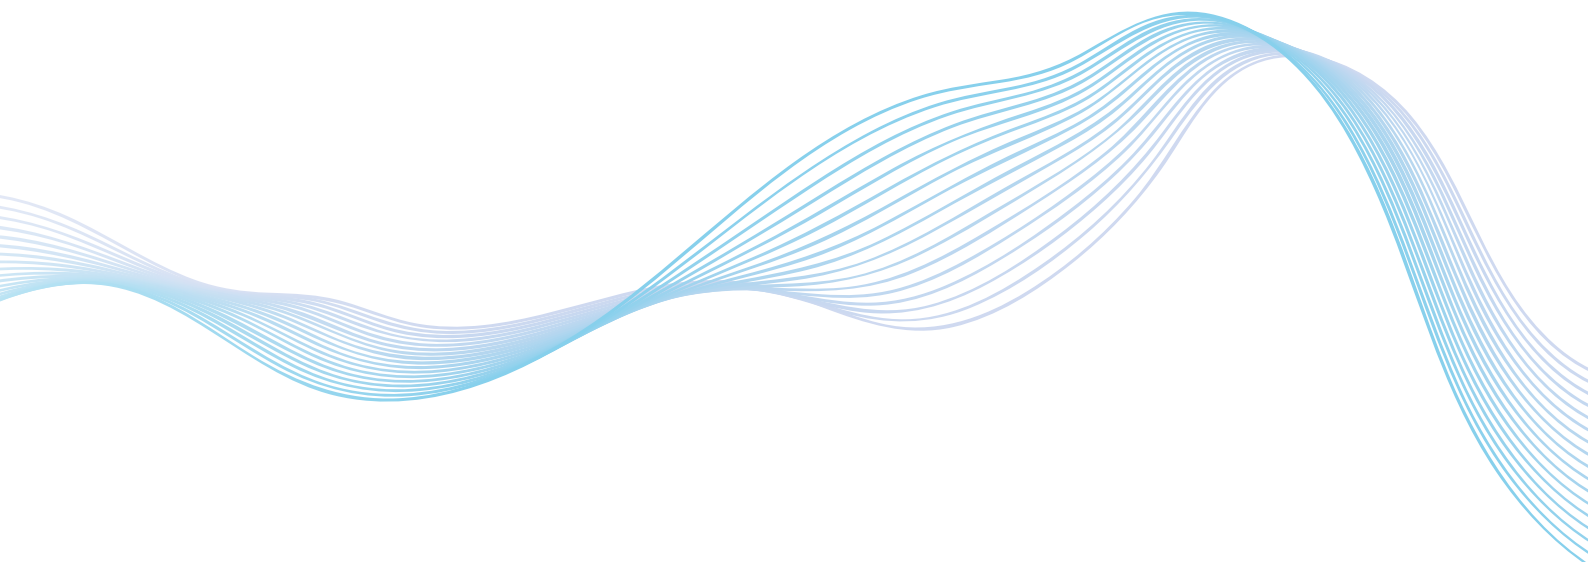

 **NIMBUS**
by GENAQ



 **AVG PLANT**
by GENAQ





STRATUS

by GENAQ

Water
from
Air

STRATUS

by GENAQ

GENAQ Stratus generators are designed in a water dispenser format to supply the purest water in public premises and homes.

Get rid of bottled water and generate your own water, at a low cost, free of chemicals and in a sustainable way.

APPLICATIONS

- Offices
- Hotels
- Restaurants
- Homes
- Hospitals
- Public premises
- Etc.





STRATUS S50

by GENAQ

52 liters per day
0.9 kW

0.39 kWh/liter
Cold water & IoT

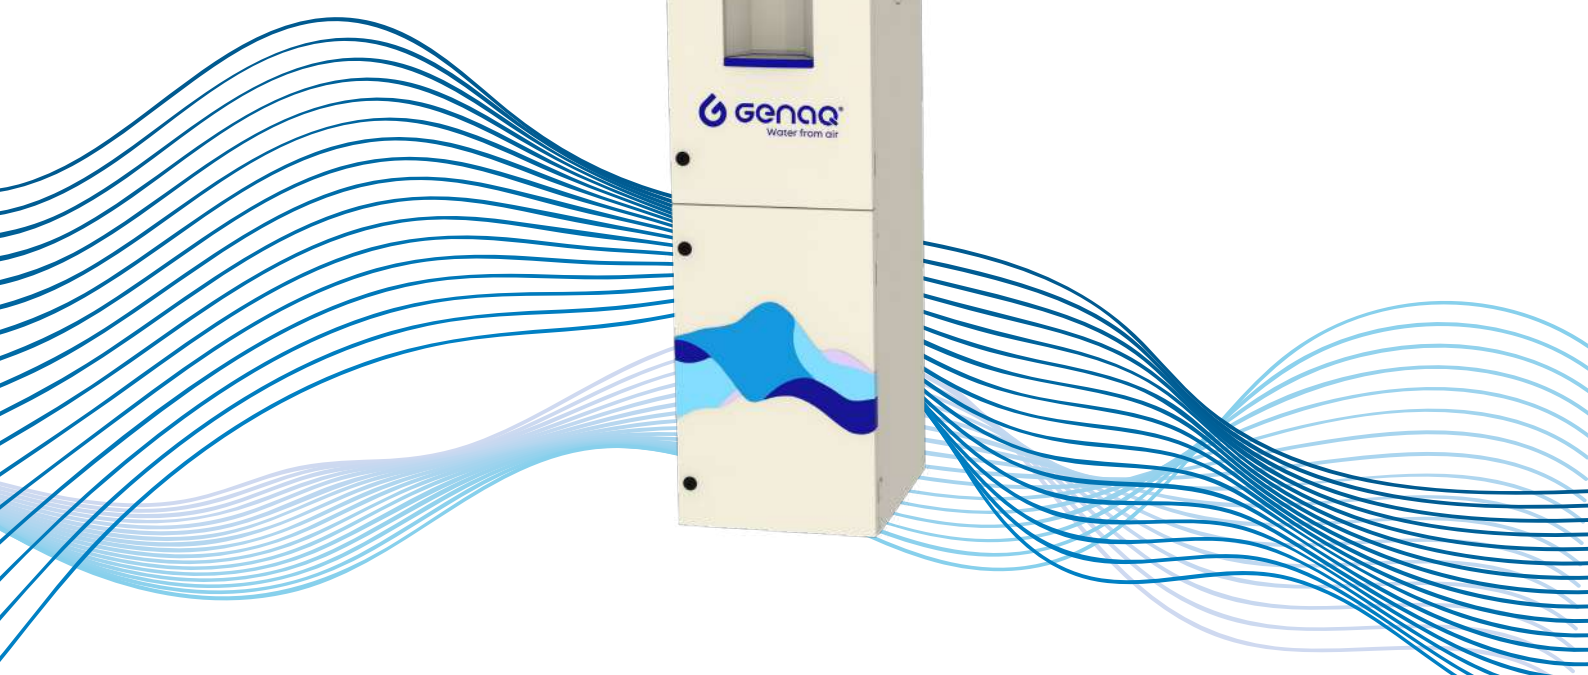

Pure Water




Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	61	60	57	55	46	35	22	19
	90	59	56	55	55	46	35	22	17
	80	56	54	52	52	43	33	21	13
	70	54	54	52	47	38	26	17	9
	60	50	51	47	40	29	21	13	
	50	43	43	37	29	22	15	7	
	40	31	30	25	20	14	7		
	30	20	19	15	11	6			
20	14	13	12	11					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.49	0.47	0.46	0.42	0.47	0.57	0.76	0.80
	90	0.47	0.45	0.42	0.39	0.46	0.52	0.69	0.80
	80	0.45	0.42	0.41	0.39	0.44	0.50	0.67	0.94
	70	0.42	0.40	0.39	0.41	0.45	0.57	0.73	1.25
	60	0.42	0.40	0.41	0.44	0.53	0.65	0.87	
	50	0.46	0.44	0.47	0.55	0.64	0.82	1.49	
	40	0.62	0.59	0.64	0.72	0.89	1.53		
	30	0.86	0.84	0.96	1.16	1.94			
20	1.10	1.10	1.15	1.20					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Stratus S50	Version	3.9
	Dimensions (Height x Width x Depth)	1510 x 460 x 565 mm
	Weight	115 kg
	Dimensions with reinforced packaging (Height x Width x Depth)	1730 x 570 x 830 mm
	Weight with reinforced packaging	160 kg
	Color	White
Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion		
Performance	Nominal Generation, at 30 °C and 80 % RH (±10 %)	52 l/day
	Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.39 kWh/l
	Specific generation, at 23 °C and 60 % RH (±10 %)	29 l/day
	Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.53 kWh/l
	Pressure sound level at 1m	62 dB(A)
Power Supply	Power Supply (Other Voltages Available)	230V-I-50Hz
	Nominal Power	0.9 kW
	Specific power	0.7 kW
	Plug/Socket	Type F
Refrigerant Circuit	Refrigerant	R134a
	Evaporation coil built in copper tubes and aluminum fins	
	Condensation coil built in copper tubes and aluminum fins	
Air Circuit	Nominal Air Flow	350 m³/h
	Air Prefilter	60 ppi prefilter
	Air Filter	F7 air filter
Hydraulic Circuit	Food grade low density lineal polyethylene tube	
	Nominal Water Flow	2 l/min
	Internal Water Storage	17 l
	External Water Tank Compatibility	No
	Water Treatment	Sediment Filter, Activated Carbon Filter, Ultrafiltration Filter, 2 x Zeolite Filter, Mineralization Filter and UV lamp
Control and Electrical Circuit	Control	Emerson PLC, Dixell IPG208D-10021
	Display	Operation indicators and access via Offline Control
	IoT	Included: Remote control via Ethernet, WIFI or M2M
	Electrical and control panel with thermal, magnetothermal and differential protection Safety, Alarms, Operating and Defrosting Cycles Control	
Safety Devices	Protection against refrigerant pressure abnormal levels for high and low pressure	
	Automatic resetting thermal protections in the compressor and motor fan	
	Protection fuses and electrical panel's general grounding	
Limits	Temperature Limits	10 °C to 45 °C
	Relative Humidity Limits	10 % to 100 %
	Storage Limit	-15 °C to 70 °C
Optional	Alternative Power Supply	Alternative Color
	Marine Environment	Solar Compatibility
	Consumables Kit	Spare Parts Kit
	WaterSanit	Plug/Socket Type
	Water Cooling/Heating	Frequency Variator


STRATUS 5200

by GENAQ

202 liters per day
1.6 kW



0.19 kWh/liter
Cold Water & IoT
External tank compatible



Pure Water



Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	199	201	210	212	174	140	110	85
	90	195	195	204	208	165	132	94	78
	80	185	187	195	202	155	125	83	53
	70	177	179	180	165	136	108	72	39
	60	163	165	157	142	115	90	52	
	50	134	145	139	119	87	69	39	
	40	102	109	99	87	66	49		
	30	80	85	78	59	45			
20	57	54	48	36					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.25	0.23	0.22	0.21	0.22	0.24	0.27	0.33
	90	0.25	0.23	0.21	0.20	0.22	0.24	0.30	0.33
	80	0.25	0.24	0.22	0.19	0.22	0.25	0.33	0.41
	70	0.26	0.25	0.23	0.22	0.24	0.28	0.33	0.48
	60	0.28	0.26	0.25	0.25	0.28	0.31	0.43	
	50	0.33	0.29	0.28	0.28	0.36	0.38	0.52	
	40	0.43	0.38	0.37	0.38	0.45	0.49		
	30	0.51	0.48	0.47	0.52	0.58			
20	0.66	0.66	0.66	0.66					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Stratus S200	Version	3.2
	Dimensions (Height x Width x Depth)	1880 x 600 x 760 mm
	Weight	261 kg
	Dimensions with reinforced packaging (Height x Width x Depth)	2092 x 770 x 1195 mm
	Weight with reinforced packaging	320 kg
	Color	White
	Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	
Performance	Nominal Generation, at 30 °C and 80 % RH (±10 %)	202 l/day
	Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.19 kWh/l
	Specific generation, at 25 °C and 60 % RH (±10 %)	115 l/day
	Specific consumption per liter, at 25 °C and 60 % RH (±10 %)	0.28 kWh/l
	Pressure sound level at 1m	69 dB (A)
Power Supply	Power Supply (Other Voltages Available)	230V-I-50Hz
	Nominal Power	1.6 kW
	Specific power	1.4 kW
	Plug/Socket	Type F
Refrigerant Circuit	Refrigerant	R134a
	Evaporation coil built in copper tubes and aluminum fins	
	Condensation coil built in copper tubes and aluminum fins	
Air Circuit	Nominal Air Flow	F1: 750 m3/h ; F2: 1250 m3/h
	Air Prefilter	60 ppi prefilter
	Air Filter	F7 air filter
Hydraulic Circuit	Food grade low density lineal polyethylene tube	
	Nominal Water Flow	P1: 2 l/min ; P2: 2 l/min
	Internal Water Storage	17 l
	External Water Tank Compatibility	Maximum 200 l with recirculation
	Water Treatment	Sediment Filter, Activated Carbon Filter, Ultrafiltration Filter, 2 x Zeolite Filter, Mineralization Filter and UV lamp
Control and Electrical Circuit	Control	Emerson PLC, Dixell IPG208D-10021
	Display	Operation indicators and access via Offline Control
	IoT	Included: Remote control via Ethernet, WIFI or M2M
	Electrical and control panel with thermal, magnetothermal and differential protection Safety, Alarms, Operating and Defrosting Cycles Control	
Safety Devices	Protection against refrigerant pressure abnormal levels for high and low pressure	
	Automatic resetting thermal protections in the compressor and motor fan	
	Protection fuses and electrical panel's general grounding	
Limits	Temperature Limits	10 °C to 45 °C
	Relative Humidity Limits	10 % to 100 %
	Storage Limit	-15 °C to 70 °C
Optional	Alternative Power Supply	Alternative Color
	Marine Environment	Solar Compatibility
	Consumables Kit	Spare Parts Kit
	WaterSanit	Plug/Socket Type
	Water Cooling/Heating	Frequency Variator



nimbus
by GENAQ



Water
from
Air

nimBUS

by GENAQ

GENAQ Nimbus range ensures pure drinking water supply no matter where you are. Become autonomous and forget about logistics and complex installations at your premises.

These off-grid solutions will allow you to reduce your costs and your environmental impact.

APPLICATIONS

- Industrial sector
- Remote locations
- Off grid buildings
- Power plants
- Mines & Oil rigs
- Construction sites
- Etc.




NIMBUS n500

by GENAQ

506 liters per day
5.1 kW

0.24 kWh/liter
External tank compatible



Pure Water



Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	415	431	458	482	339	261	211	151
	90	420	441	470	493	351	280	219	150
	80	413	453	482	506	371	284	221	114
	70	405	428	420	434	313	247	186	84
	60	363	378	384	356	271	218	121	
	50	277	278	269	251	193	162	80	
	40	212	198	189	166	147	95		
	30	153	135	128	110	88			
20	122	104	84	65					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.33	0.31	0.29	0.26	0.32	0.36	0.38	0.40
	90	0.32	0.30	0.28	0.25	0.31	0.33	0.37	0.40
	80	0.32	0.29	0.26	0.24	0.29	0.32	0.35	0.51
	70	0.32	0.30	0.30	0.28	0.32	0.34	0.39	0.63
	60	0.35	0.33	0.32	0.31	0.35	0.39	0.52	
	50	0.45	0.44	0.42	0.41	0.43	0.44	0.64	
	40	0.57	0.55	0.53	0.51	0.51	0.59		
	30	0.68	0.68	0.68	0.65	0.62			
20	0.70	0.70	0.70	0.70					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Nimbus N500	Version	4.3
	Dimensions (Height x Width x Depth)	1800 x 790 x 1180 mm
	Weight	380 kg
	Dimensions with reinforced packaging (Height x Width x Depth)	2350 x 915 x 1370 mm
	Weight with reinforced packaging	452 kg
	Color	White
	Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	
Performance	Nominal Generation, at 30 °C and 80 % RH (±10 %)	506 l/day
	Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.24 kWh/l
	Specific generation, at 23 °C and 60 % RH (±10 %)	271 l/day
	Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.35 kWh/l
	Pressure sound level at 1m	74 dB (A)
Power Supply	Power Supply (Other Voltages Available)	400V-III-50Hz
	Nominal Power	5.1 kW
	Specific power	4 kW
	Plug/Socket	32A 5-pin Socket
Refrigerant Circuit	Refrigerant	R134a
	Evaporation coil built in copper tubes and aluminum fins	
	Condensation coil built in copper tubes and aluminum fins	
Air Circuit	Nominal Air Flow	2000 m³/h
	Air Prefilter	60 ppi prefilter
	Air Filter	F7 air filter
Hydraulic Circuit	Food grade low density lineal polyethylene tube	
	Nominal Water Flow	P1: 7.6 l/min ; P2: 7.6 l/min
	Internal Water Storage	18.5 l
	External Water Tank Compatibility	Maximum 600 l with recirculation
	Water Treatment	Sediment Prefilter, Sediment Filter, Activated Carbon Filter, Ultrafiltration Filter, Zeolite Filter, Mineralization Filter and UV lamp
Control and Electrical Circuit	Control	Emerson PLC, Dixell IPG208D-10021
	Display	VGIPG VISOGRAPH
	IoT	Included: Remote control via Ethernet, WIFI or M2M
	Electrical and control panel with thermal, magnetothermal and differential protection	
	Safety, Alarms, Operating and Defrosting Cycles Control	
Safety Devices	Protection against refrigerant pressure abnormal levels for high and low pressure	
	Automatic resetting thermal protections in the compressor and motor fan	
	Protection fuses and electrical panel's general grounding	
Limits	Temperature Limits	10 °C to 45 °C
	Relative Humidity Limits	10 % to 100 %
	Storage Limit	-15 °C to 70 °C
Optional	Alternative Power Supply	Alternative Color
	Marine Environment	Solar Compatibility
	Consumables Kit	Spare Parts Kit
	Soft Starter	Chlorine Dosing Pump
	Frequency Variator	


NIMBUS n4500

by GENAQ



4445 liters per day
40.8 kW

0.22 kWh/liter
External tank compatible



Pure Water



Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	3855	3944	4143	4237	2744	2118	1713	1295
	90	3845	3971	4168	4253	2832	2259	1765	1288
	80	4068	4168	4370	4449	3104	2374	1850	1010
	70	3825	3884	3755	3817	2615	2063	1585	648
	60	3312	3379	3375	2976	2263	1822	1055	
	50	2172	2259	2071	1932	1488	1280	662	
	40	1549	1388	1326	1167	1052	706		
	30	1075	944	901	799	659			
20	821	720	603	475					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.31	0.30	0.27	0.25	0.34	0.38	0.40	0.37
	90	0.30	0.28	0.26	0.24	0.33	0.35	0.39	0.37
	80	0.28	0.26	0.24	0.22	0.29	0.32	0.36	0.46
	70	0.29	0.27	0.27	0.25	0.32	0.35	0.38	0.65
	60	0.32	0.30	0.29	0.31	0.36	0.39	0.48	
	50	0.47	0.44	0.46	0.45	0.47	0.46	0.61	
	40	0.63	0.67	0.64	0.62	0.60	0.63		
	30	0.82	0.82	0.82	0.74	0.66			
20	0.89	0.83	0.78	0.75					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Nimbus N4500

Version	4.0
Dimensions (Height x Width x Depth)	2170 x 2380 x 3420 mm
Weight	5200 kg
Dimensions with reinforced packaging (Height x Width x Depth)	No
Weight with reinforced packaging	No
Color	White
Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	

Performance

Nominal Generation, at 30 °C and 80 % RH (±10 %)	4445 l/day
Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.22 kWh/l
Specific generation, at 23 °C and 60 % RH (±10 %)	2263 l/day
Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.36 kWh/l
Pressure sound level at 1m	74 dB (A)

Power Supply

Power Supply (Other Voltages Available)	400V-III-50Hz
Nominal Power	40.8 kW
Specific power	34 kW
Plug/Socket	Direct Connection (3x70 + N + T mm2)

Refrigerant Circuit

Refrigerant	R134a
Evaporation coil built in copper tubes and aluminum fins	
Condensation coil built in copper tubes and aluminum fins	

Air Circuit

Nominal Air Flow	F1: 7000 m³/h ; F2: 7000 m³/h ; F3: 7000 m³/h
Air Prefilter	60 ppi prefilter
Air Filter	F7 air filter

Hydraulic Circuit

Food grade low density lineal polyethylene tube	
Nominal Water Flow	P1: 25 l/min ; P2: 25 l/min
Internal Water Storage	120 l
External Water Tank Compatibility	Maximum 2000 l with recirculation
Water Treatment	Sediment Filter (three steps), Activated Carbon, Mineralization, Chlorine Dosing and UV lamp

Control and Electrical Circuit

Control	Emerson PLC, Dixell IPG215D-12100
Display	VGIPG VISOGRAPH
IoT	Included: Remote control via Ethernet, WIFI or M2M
Electrical and control panel with thermal, magnetothermal and differential protection	
Safety, Alarms, Operating and Defrosting Cycles Control	

Safety Devices

Protection against refrigerant pressure abnormal levels for high and low pressure	
Automatic resetting thermal protections in the compressor and motor fan	
Protection fuses and electrical panel's general grounding	

Limits

Temperature Limits	10 °C to 45 °C
Relative Humidity Limits	10 % to 100 %
Storage Limit	-15 °C to 70 °C

Optional

Alternative Power Supply	Alternative Color
Marine Environment	Solar Compatibility
Consumables Kit	Spare Parts Kit
20ft Container Adaptation	Frequency Variator

CUMULUS

by GENAQ



Water
from
Air

CUMULUS

by GENAQ

GENAQ Cumulus generators are designed with reinforced structure and portability features, to supply high-quality drinking water.

Become independent from any uncontrolled water source and ensure your drinking water availability in any situation.

APPLICATIONS

- Disaster Relief
- Humanitarian Aid
- Civilian Camps
- Military Camps
- Development Aid
- Etc.




CUMULUS C50

by GENAQ

52 liters per day
0.9 kW

0.42 kWh/liter
Compact and portable



Pure Water



Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	55	55	58	57	36	28	22	17
	90	54	54	56	56	37	29	23	15
	80	53	53	55	52	38	29	23	12
	70	51	49	47	44	32	25	19	9
	60	42	42	41	36	28	22	12	
	50	31	29	28	26	20	17	8	
	40	21	19	19	16	14	9		
	30	17	14	13	11	9			
20	13	12	12	8					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.55	0.52	0.48	0.44	0.54	0.60	0.64	0.67
	90	0.53	0.51	0.47	0.43	0.53	0.57	0.62	0.67
	80	0.52	0.49	0.46	0.42	0.49	0.55	0.61	0.80
	70	0.52	0.51	0.51	0.48	0.55	0.59	0.67	1.06
	60	0.60	0.57	0.55	0.53	0.61	0.67	0.89	
	50	0.77	0.74	0.70	0.68	0.72	0.74	1.07	
	40	1.01	0.99	0.95	0.92	0.92	1.06		
	30	1.16	1.16	1.16	1.11	1.05			
20	1.30	1.30	1.30	1.30					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Cumulus C50	Version	2.1
	Dimensions (Height x Width x Depth)	1050 x 390 x 575 mm
	Weight	70 kg
	Dimensions with reinforced packaging (Height x Width x Depth)	1400 x 550 x 750 mm
	Weight with reinforced packaging	106 kg
	Color	Green
	Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	
Performance	Nominal Generation, at 30 °C and 80 % RH (±10 %)	52 l/day
	Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.42 kWh/l
	Specific generation, at 23 °C and 60 % RH (±10 %)	28 l/day
	Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.61 kWh/l
	Pressure sound level at 1m	72.7 dB (A)
Power Supply	Power Supply (Other Voltages Available)	230V-I-50Hz
	Nominal Power	1 kW
	Specific power	0.8 kW
	Plug/Socket	Type F
Refrigerant Circuit	Refrigerant	R134a
	Evaporation coil built in copper tubes and aluminum fins	
	Condensation coil built in copper tubes and aluminum fins	
Air Circuit	Nominal Air Flow	F1: 150 m³/h ; F2: 150 m³/h
	Air Prefilter	No
	Air Filter	M5 air filter
Hydraulic Circuit	Food grade low density lineal polyethylene tube	
	Nominal Water Flow	1 l/min
	Internal Water Storage	9 l
	External Water Tank Compatibility	No
	Water Treatment	Sediment Filter, Activated Carbon Filter, Ultrafiltration Filter, Zeolite Filter, Mineralization Filter and UV lamp
Control and Electrical Circuit	Control	Emerson DCS, Dixell XW60VS
	Display	Operation indicators and access via internal display
	IoT	No
	Electrical and control panel with thermal, magnetothermal and differential protection Safety, Alarms, Operating and Defrosting Cycles Control	
Safety Devices	Protection against refrigerant pressure abnormal levels for high and low pressure	
	Automatic resetting thermal protections in the compressor and motor fan	
	Protection fuses and electrical panel's general grounding	
Limits	Temperature Limits	10 °C to 45 °C
	Relative Humidity Limits	10 % to 100 %
	Storage Limit	-15 °C to 70 °C
Optional	Alternative Power Supply	Alternative Color
	Marine Environment	Solar Compatibility
	Consumables Kit	Spare Parts Kit
	Plug/Socket Type	

CUMULUS C500


by GENAQ

502 liters per day

5.5 kW

0.26 kWh/liter

External tank compatible



Pure Water



Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	451	462	492	518	364	281	227	165
	90	436	454	483	509	361	288	225	165
	80	429	446	475	502	366	280	218	120
	70	398	422	415	427	308	243	183	86
	60	360	373	379	351	267	215	119	
	50	254	275	264	247	190	160	79	
	40	179	177	169	149	132	85		
	30	124	121	115	99	79			
20	98	93	86	76					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.33	0.31	0.29	0.26	0.32	0.36	0.38	0.45
	90	0.33	0.31	0.29	0.26	0.32	0.35	0.38	0.45
	80	0.33	0.31	0.29	0.26	0.31	0.35	0.38	0.56
	70	0.35	0.32	0.32	0.30	0.35	0.37	0.42	0.70
	60	0.38	0.36	0.35	0.34	0.38	0.42	0.56	
	50	0.52	0.48	0.46	0.44	0.47	0.48	0.70	
	40	0.67	0.66	0.64	0.61	0.61	0.71		
	30	0.83	0.82	0.82	0.78	0.74			
20	0.98	0.98	0.98	0.95					

Data measured in Climate Chamber, audited and certified.
 Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Cumulus C500	Version	3.4
	Dimensions (Height x Width x Depth)	1110 x 1095 x 1300 mm
	Weight	337 kg
	Dimensions with reinforced packaging (Height x Width x Depth)	1575 x 1240 x 1550 mm
	Weight with reinforced packaging	430 kg
	Color	Green
	Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	
Performance	Nominal Generation, at 30 °C and 80 % RH (±10 %)	502 l/day
	Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.26 kWh/l
	Specific generation, at 23 °C and 60 % RH (±10 %)	267 l/day
	Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.38 kWh/l
	Pressure sound level at 1m	74 dB (A)
Power Supply	Power Supply (Other Voltages Available)	400V-III-50Hz
	Nominal Power	5.5 kW
	Specific power	4.3 kW
	Plug/Socket	32A 5-pin Socket
Refrigerant Circuit	Refrigerant	R134a
	Evaporation coil built in copper tubes and aluminum fins	
	Condensation coil built in copper tubes and aluminum fins	
Air Circuit	Nominal Air Flow	2000 m³/h
	Air Prefilter	60 ppi prefilter
	Air Filter	F7 air filter
Hydraulic Circuit	Food grade low density lineal polyethylene tube	
	Nominal Water Flow	P1: 7.6 l/min ; P2: 7.6 l/min
	Internal Water Storage	14 l
	External Water Tank Compatibility	Maximum 600 l with recirculation
	Water Treatment	Sediment Prefilter, Sediment Filter, Activated Carbon Filter, Ultrafiltration Filter, Zeolite Filter, Mineralization Filter and UV lamp
Control and Electrical Circuit	Control	Emerson PLC, Dixell IPG208D-10021
	Display	VGIPG VISOGRAPH
	IoT	Included: Remote control via Ethernet, WIFI or M2M
	Electrical and control panel with thermal, magnetothermal and differential protection Safety, Alarms, Operating and Defrosting Cycles Control	
Safety Devices	Protection against refrigerant pressure abnormal levels for high and low pressure	
	Automatic resetting thermal protections in the compressor and motor fan	
	Protection fuses and electrical panel's general grounding	
Limits	Temperature Limits	10 °C to 45 °C
	Relative Humidity Limits	10 % to 100 %
	Storage Limit	-15 °C to 70 °C
Optional	Alternative Power Supply	Alternative Color
	Marine Environment	Solar Compatibility
	Consumables Kit	Spare Parts Kit
	Soft Starter	Chlorine Dosing Pump
	Frequency Variator	


CUMULUS C5000

by GENAQ



5091 liters per day
55.2 kW

0.26 kWh/liter
External tank compatible



Pure Water




Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	4411	4513	4741	4848	3305	2552	2063	1471
	90	4400	4544	4769	4867	3411	2721	2126	1462
	80	4655	4769	5000	5091	3739	2859	2229	1143
	70	4376	4444	4296	4368	3150	2485	1870	727
	60	3789	3867	3862	3585	2726	2195	1215	
	50	2486	2585	2495	2328	1793	1505	744	
	40	1773	1671	1597	1406	1245	800		
	30	1295	1137	1085	932	742			
20	989	841	683	526					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.37	0.35	0.32	0.30	0.36	0.41	0.43	0.45
	90	0.36	0.34	0.31	0.29	0.35	0.38	0.42	0.45
	80	0.33	0.31	0.29	0.26	0.31	0.35	0.38	0.56
	70	0.34	0.32	0.32	0.30	0.35	0.37	0.42	0.80
	60	0.38	0.36	0.35	0.34	0.38	0.42	0.56	
	50	0.56	0.52	0.49	0.48	0.51	0.52	0.75	
	40	0.75	0.72	0.69	0.66	0.66	0.77		
	30	0.88	0.88	0.88	0.85	0.81			
20	0.95	0.95	0.95	0.95					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Cumulus C5000

Version	4.1
Dimensions (Height x Width x Depth)	2190 x 2310 x 4790 mm
Weight	5800 kg
Dimensions with reinforced packaging (Height x Width x Depth)	No
Weight with reinforced packaging	No
Color	Green
Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	

Performance

Nominal Generation, at 30 °C and 80 % RH (±10 %)	5091 l/day
Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.26 kWh/l
Specific generation, at 23 °C and 60 % RH (±10 %)	2726 l/day
Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.38 kWh/l
Pressure sound level at 1m	74 dB (A)

Power Supply

Power Supply (Other Voltages Available)	400V-III-50Hz
Nominal Power	55.2 kW
Specific power	43.2 kW
Plug/Socket	Direct Connection (3x70 + N + T mm2)

Refrigerant Circuit

Refrigerant	R134a
Evaporation coil built in copper tubes and aluminum fins	
Condensation coil built in copper tubes and aluminum fins	

Air Circuit

Nominal Air Flow	F1: 7000 m³/h ; F2: 7000 m³/h ; F3: 7000 m³/h
Air Prefilter	60 ppi prefilter
Air Filter	F7 air filter

Hydraulic Circuit

Food grade low density lineal polyethylene tube	
Nominal Water Flow	P1: 25 l/min ; P2: 25 l/min
Internal Water Storage	120 l
External Water Tank Compatibility	Maximum 2000 l with recirculation
Water Treatment	Sediment Filter (three steps), Activated Carbon, Zeolite, Mineralization, Chlorine Dosing and UV lamp

Control and Electrical Circuit

Control	Emerson PLC, Dixell IPG215D-12100
Display	VGIPG VISOGRAPH
IoT	Included: Remote control via Ethernet, WIFI or M2M
Electrical and control panel with thermal, magnetothermal and differential protection	
Safety, Alarms, Operating and Defrosting Cycles Control	

Safety Devices

Protection against refrigerant pressure abnormal levels for high and low pressure	
Automatic resetting thermal protections in the compressor and motor fan	
Protection fuses and electrical panel's general grounding	

Limits

Temperature Limits	10 °C to 45 °C
Relative Humidity Limits	10 % to 100 %
Storage Limit	-15 °C to 70 °C

Optional

Alternative Power Supply	Alternative Color
Marine Environment	Solar Compatibility
Consumables Kit	Spare Parts Kit
20ft Container Adaptation	Power Unit
Frequency Variator	


CUMULUS C5000-CO

by GENAQ



5091 liters per day
55.2 kW
20ft integrated solution

0.26 kWh/liter
External tank compatible
2000-liter internal tank



Pure Water



Sustainability



Efficiency



Plug & Drink



Autonomy

Generation (liters per day)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	4411	4513	4741	4848	3305	2552	2063	1471
	90	4400	4544	4769	4867	3411	2721	2126	1462
	80	4655	4769	5000	5091	3739	2859	2229	1143
	70	4376	4444	4296	4368	3150	2485	1870	727
	60	3789	3867	3862	3585	2726	2195	1215	
	50	2486	2585	2495	2328	1793	1505	744	
	40	1773	1671	1597	1406	1245	800		
	30	1295	1137	1085	932	742			
20	989	841	683	526					

Consumption (kWh per liter)

		Temperature (°C)							
		45	40	35	30	25	20	15	10
Relative Humidity (%)	100	0.37	0.35	0.32	0.30	0.36	0.41	0.43	0.45
	90	0.36	0.34	0.31	0.29	0.35	0.38	0.42	0.45
	80	0.33	0.31	0.29	0.26	0.31	0.35	0.38	0.56
	70	0.34	0.32	0.32	0.30	0.35	0.37	0.42	0.80
	60	0.38	0.36	0.35	0.34	0.38	0.42	0.56	
	50	0.56	0.52	0.49	0.48	0.51	0.52	0.75	
	40	0.75	0.72	0.69	0.66	0.66	0.77		
	30	0.88	0.88	0.88	0.85	0.81			
20	0.95	0.95	0.95	0.95					

Data measured in Climate Chamber, audited and certified.
Generation may be affected by factors such as height, filter cleaning, wind, etc.

Features

GENAQ Cumulus C5000

Version	4.1-CO
Dimensions (Height x Width x Depth)	2600 x 2240 x 6060 mm (20ft container)
Weight	Containerized generator: 8000 kg With PU optional: 10000 kg
Dimensions with reinforced packaging (Height x Width x Depth)	No
Weight with reinforced packaging	No
Color	Green
Manufactured in galvanized steel sheet structure with polyester paint of high resistance to corrosion	

Performance

Nominal Generation, at 30 °C and 80 % RH (±10 %)	5091 l/day
Nominal consumption per liter, at 30 °C and 80 % RH (±10 %)	0.26 kWh/l
Specific generation, at 23 °C and 60 % RH (±10 %)	2726 l/day
Specific consumption per liter, at 23 °C and 60 % RH (±10 %)	0.38 kWh/l
Pressure sound level at 1m	74 dB(A)

Power Supply

Power Supply (Other Voltages Available)	400V-III-50Hz
Nominal Power	55.2 kW
Specific power	43.2 kW
Plug/Socket	Direct Connection (3 x 70 + N + T mm²)

Refrigerant Circuit

Refrigerant	R134a
Evaporation coil built in copper tubes and aluminum fins	
Condensation coil built in copper tubes and aluminum fins	

Air Circuit

Nominal Air Flow	F1: 7000 m³/h ; F2: 7000 m³/h ; F3: 7000 m³/h
Air Prefilter	60 ppi prefilter
Air Filter	F7 air filter

Hydraulic Circuit

Food grade low density lineal polyethylene tube	
Nominal Water Flow	P1: 25 l/min ; P2: 25 l/min
Internal Water Storage	120 l
External Water Tank Compatibility	Maximum 2000 l with recirculation
Water Treatment	Sediment Filter (three steps), Activated Carbon, Zeolite, Mineralization, Chlorine Dosing and UV lamp

Control and Electrical Circuit

Control	Emerson PLC, Dixell IPG215D-12100
Display	VGIPG VISOGRAPH
IoT	Included: Remote control via Ethernet, WIFI or M2M
Electrical and control panel with thermal, magnetothermal and differential protection	
Safety, Alarms, Operating and Defrosting Cycles Control	

Safety Devices

Protection against refrigerant pressure abnormal levels for high and low pressure	
Automatic resetting thermal protections in the compressor and motor fan	
Protection fuses and electrical panel's general grounding	

Limits

Temperature Limits	10 °C to 45 °C
Relative Humidity Limits	10 % to 100 %
Storage Limit	-15 °C to 70 °C

Optional

Alternative Power Supply	Alternative Color
Marine Environment	Solar Compatibility
Consumables Kit	Spare Parts Kit
Integrated Power Unit	Frequency Variator



AWG PLANT
by GENAQ

Water
from
Air

AWVG PLANT

by **GENAQ**


A tailored project to offer a solution for larger high-quality water needs for residential water supply, bottling plants, industrial processes, etc.


This solution has been optimized for both low investment and operating cost per liter.

Starting from 100,000 liter per day up to more than 1,500,000 liters per day. GENAQ works in these customized projects to cover your specific requirements.

APPLICATIONS

Residential Water Supply
Food Industry
Industrial Processes
Bottling Plants
Customized Projects
Etc.

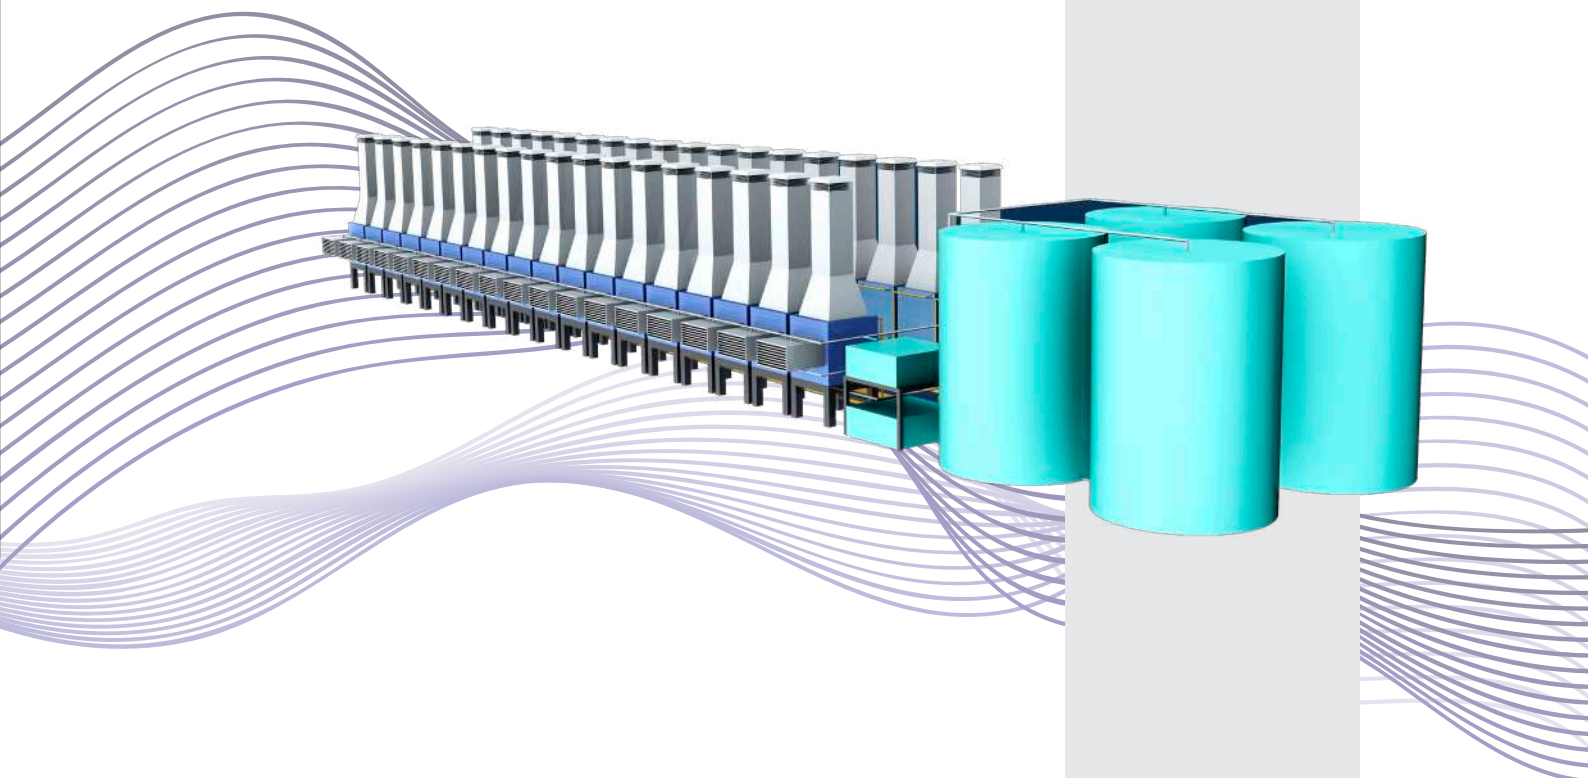

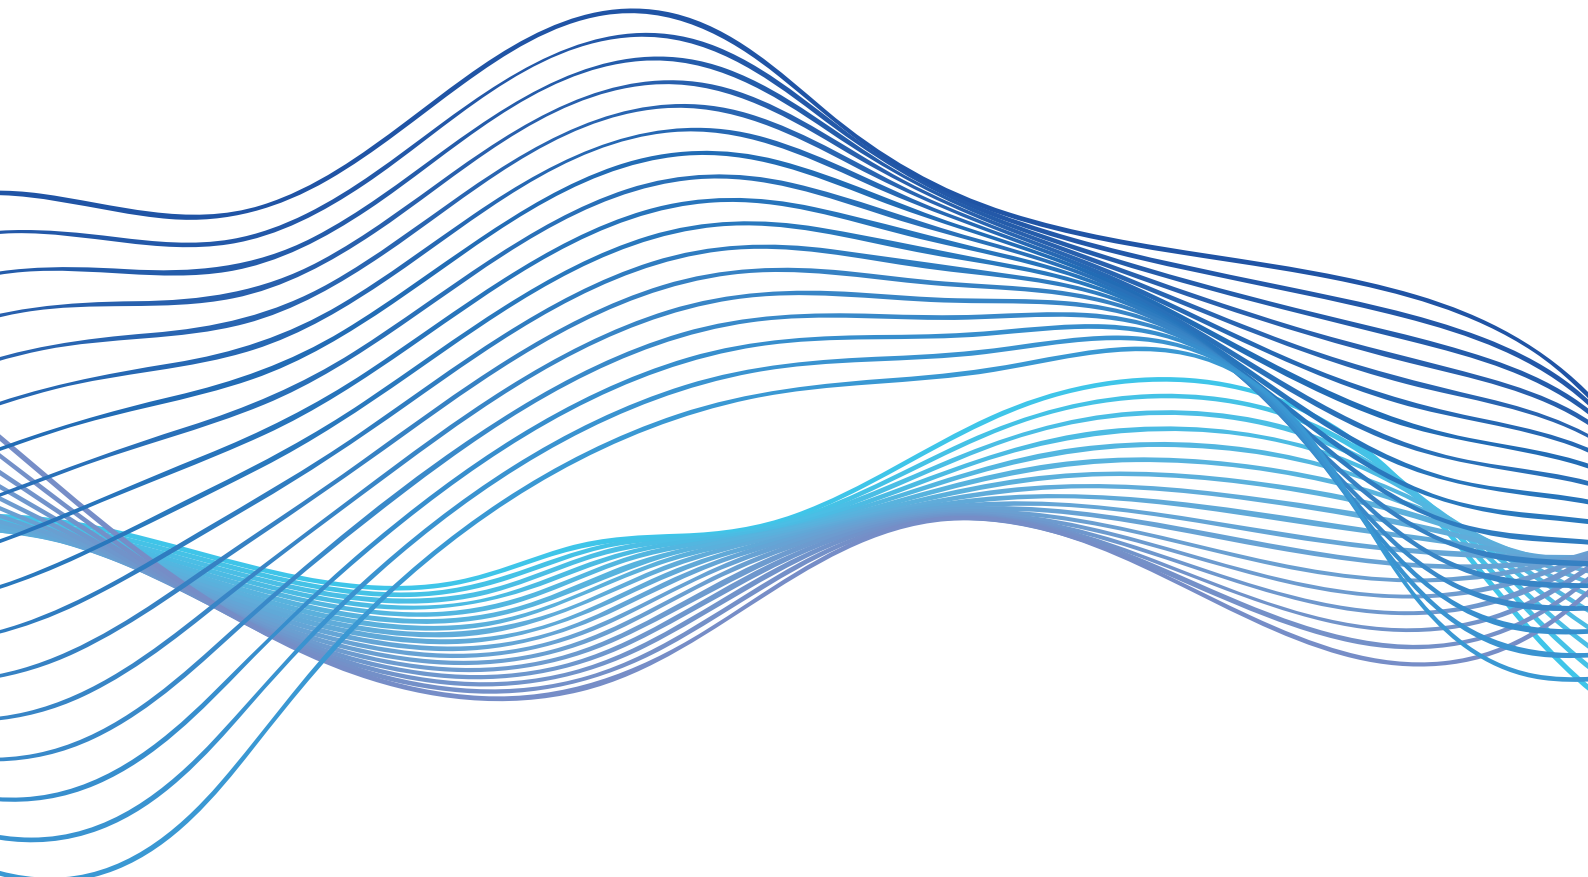

GENAQ Technologies S.L.

Bulevar Los Santos 44
14900 - Lucena - Spain
+34 957 625 712
www.genaq.com
info@genaq.com



Contact Us!

We would love to solve your unique needs.
Send us an email and we will study your case.